

# ALUMINIUM SLIDING GATE HOLLER PRO CLASSIC

# HOLLER


GATES - FENCES - AUTOMATION



- Cantilever, telescopic, Incline & Tracked gate models
- Welded aluminum in accordance with standard EN1090
- Single leaf widths up to 25 m width (50 m double leaf)
- Heights up to 5,2 m (special sizes on request)
- Vertical bar/weld mesh/perforated sheet/solid or custom infills
- Integrated automation and guiding system for trouble-free operation
- 100% factory tested
- Meets your access control application requirements
- Superior powder-coat finish in a wide variety of colors
- Plug and play installation
- EN 13241-I; CE certified
- Manufactured in accordance with ISO 9001
- GBS International 15-year powder coat guarantee

	HOLLER 100	HOLLER 120	HOLLER 250
Gate width up to...	10m/500kg	12m/700kg	25m/3000kg
Base plate 400 x 330 mm (single post)	✓	✓	✓
Base plate 563 x 330 mm (double post)	✓	✓	✓
Aluminium post 220 x 172 mm	✓	✓	✓
Flashing warning light	✓	✓	✓
Photocells mounted at 600 mm	✓	✓	✓
Built-in radio receiver+ 433 MHz	✓	✓	✗
Key switch in fixing post+3 keys	✓	✓	✓
Programable control system	✓	✓	✓
Battery backup (UPS) NiMH	✓	✓	✗
Temperature range 20 /+60 C	✓	✓	✓
Supply voltage 230V AC	✓	✓	✓
Control voltage 24V DC	✓	✓	✓
Limit switch encoder	✓	✓	✗
Adjustable soft start/stop	✓	✓	✓
Opening speed per minute	10,8 m/min	10,8 m/min	18 m/min
Torque approx. Nm	60	60	100
Duty Cycle	70%	70%	100%
Max power consumption (amps)	6,5	8,5	8

## AERIAL PLAN VIEW

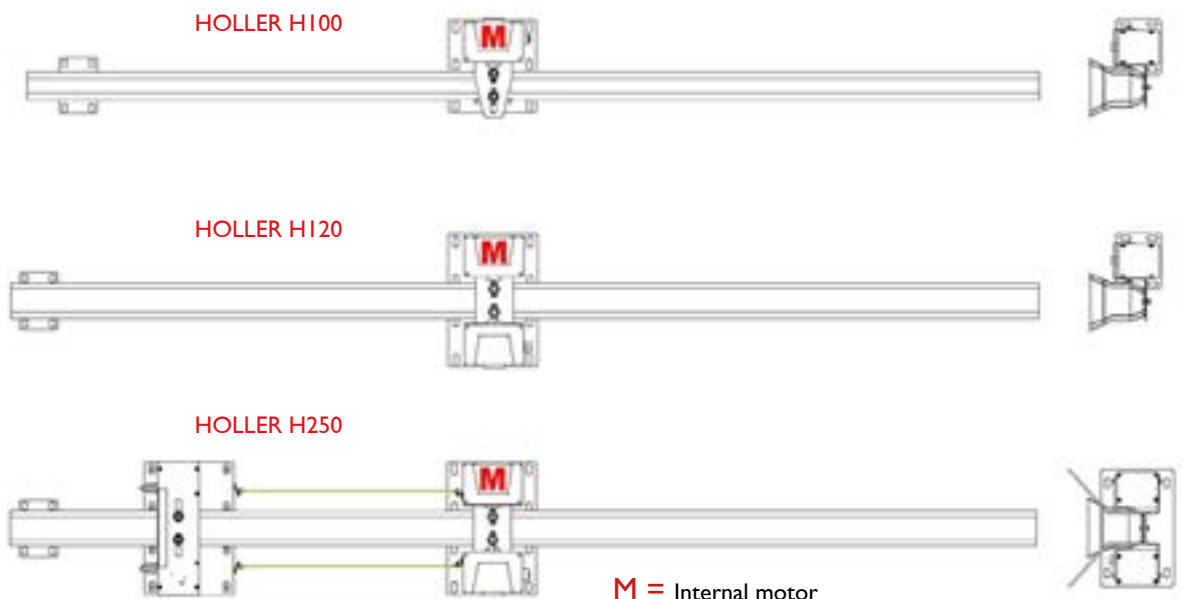

Meets all the safety requirements and provisions of EN13241-1



Peritect Ltd. Lower Brimscombe Mill, Brimscombe, Stroud, Gloucestershire - GL5 2SB  
T: 01453 883392 E: [office@peritect.co.uk](mailto:office@peritect.co.uk)